



*Simply Engineered Better*

# 201LT

Undercounter Low Temperature Dishwashing Machine



Shown with standard top and side panels.

## SPECIFIER STATEMENT

Dishwasher will be Moyer Diebel model 201LT low temperature undercounter dishwasher, complete with 1 Hp pump motor, soft start feature, all stainless steel frame and fill and drain type operation. Machine to have a minimum of 15-3/4" [400mm] opening to accommodate trays.

1 year parts and labor warranty.



Project \_\_\_\_\_

Item No. \_\_\_\_\_

Quantity \_\_\_\_\_

**501LT UNDERCOUNTER**


## STANDARD FEATURES

- Industry exclusive high grade 316 stainless steel
- "Vari-cycle" button. Allows unlimited number of user selectable cycle times
- Delime cycle
- Auto-clean cycle
- Micro-computer solid-state controls
- Soft start provides gradual and quiet pump activation and prevents dish and glass breakage
- Fill and drain type operation. Rinse water always re-used as next cycle's wash water. Low 1.5 imp gal (7L) water usage per rack.
- Electric tank heater (.75 kW)
- Liquid detergent, sanitizer and rinse-aid dispensing pumps complete with prime switches
- Flexible fill and drain lines, flow regulator/line strainer and standard pumped drain for total ease of installation
- Quick 141 second cycle time. 25 racks per hour capacity
- Large 15-3/4" [400mm] door opening accommodates trays
- Rugged, counter-balanced, double skin door, for quieter operation
- Complete with two 20" x 20" [508 x 508 mm] racks (one peg and one flat )
- One year parts and labor warranty

## OPTIONS & ACCESSORIES

- |                                               |               |
|-----------------------------------------------|---------------|
| <input type="checkbox"/> 1" roller casters    | P/N 0712480-1 |
| <input type="checkbox"/> Flat bottom dishrack | P/N 101273    |
| <input type="checkbox"/> Peg dishrack         | P/N 101285    |
| <input type="checkbox"/> 6" Stand             | P/N 0712393   |
| <input type="checkbox"/> 17RS – 17" Stand     | P/N 0708757   |

Dimensions shown in inches and [millimeters]

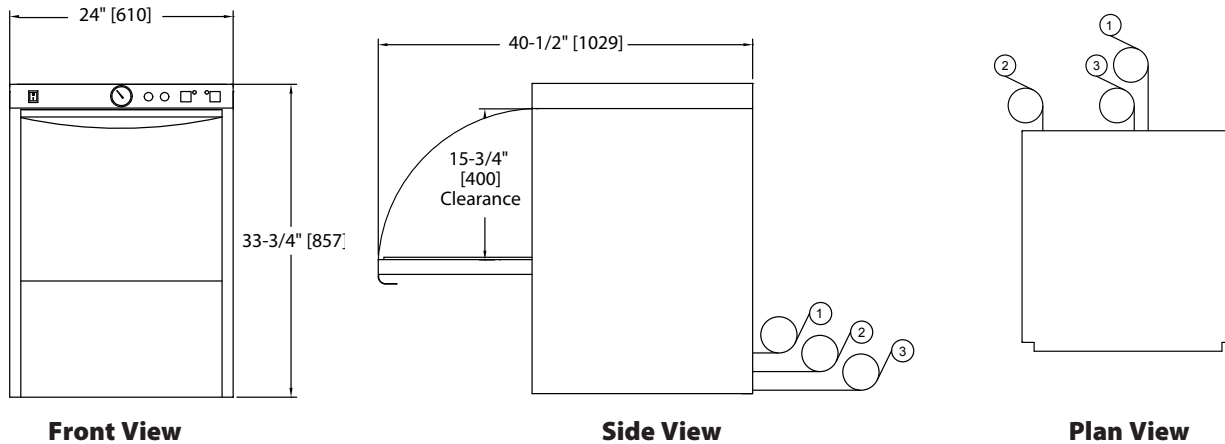

## Utilities

- 1 Electrical Connection**  
115/60/1; 12 amp draw; to be fused at 15 amp. 4ft. plug-in cord supplied.
- 2 Water Connection**  
120°F Min., 1/2" supply hot water connection  
6 ft. long, 1/2" I.D. flexible fill hose with 3/4" garden hose connector  
Flow pressure: 25-95 psi (173-656 kPa)
- 3 Drain Connection**  
6 ft. long, 5/8" I.D. flexible drain hose; c/w 3/4" MNPT fitting  
Max. drain flow: 15 US gpm

## SPECIFICATIONS

<b>Capacity</b>	Racks per hr.	25
<b>Motor Horsepower</b>	Wash	1
<b>Water Consumption</b>	Per hr. (max. use )	32 US gal
	Per rack	1.5 US gal
<b>Temperatures °F</b>	Wash (minimum)	120° (140° recommended)
	Rinse (minimum)	120° (140° recommended)
<b>Heating</b>	Tank heat, electric (kW)	.75
<b>Time Cycle in Seconds</b>	Wash	90
	Rinse	26
	Drain/fill	25
	Total	141

**Warning:** Plumbing and electrical connections should be made by qualified personnel who will observe all the applicable plumbing, sanitary and safety codes.

	Uncrated	Crated
<b>Height*</b>	33-3/4"	39-1/2"
<b>Width</b>	24"	25"
<b>Depth</b>	25"	25-1/2"
<b>Ship Wt. lbs</b>	178	198

\* Front leveling feet provided.

Due to an ongoing value analysis program at Moyer Diebel, specifications in this catalog are subject to change without notice.

Moyer Diebel – USA  
3765 Champion Blvd., NC 27105  
336/661-1979 • Fax: 336/661-1979

www.MoyerDiebel

7/17

an Ali Group Company



The Spirit of Excellence