

Project _			
Item No			
Quantity .			
Qualitity.			

MD2000LT

Low Temperature Door-type Dishwashing Machine



SPECIFIER STATEMENT

Specified unit will be Moyer Diebel MD2000LT 3 Door Lift low temperature, chemical sanitizing commercial dishwashers meet ETL, UL, and CUL sanitation and construction standards WITHOUT the use of BOOSTER or TANK HEATERS. The model is constructed entirely of stainless steel. Each unit automatically washes, rinses and sanitizes wares in standard 19-3/4" x 19-3/4" racks. Units come with standard upper and lower stainless steel wash arms.

STANDARD FEATURES

- ENERGY STAR® Qualified
- Uses only 1.01 US gallons (.84 imp/3.8L) of water per cycle
- Quick 90 second cycle time
- 40 racks / hour
- Economical to operate
- All stainless steel construction
- Unique spray arm system features upper and lower stainless steel wash arms with reinforced end caps
- Top mounted controls include built-in chemical pumps and deliming system for dealing with scale
- Auto start/stop
- New integrated scrap tray prevents food soil from entering drain system
- Airgap fill system
- 20-1/2" tall door opening
- 115 volt unit 20 amp breaker required

OPTIONS & ACCESSORIES

- ☐ Sanitizer Alarm
- ☐ Vent Fan Control





MD2000LT

Low Temperature Door-type Dishwashing Machine

Shipping weight crated: 262 lbs.

Dimensions shown in inches

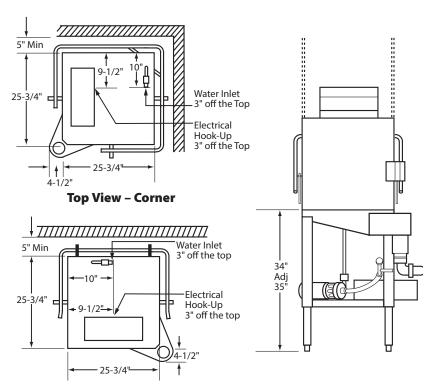

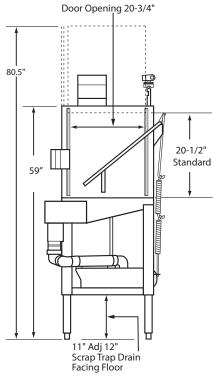

Front View

Top View - Straight

Right View

Warning: Plumbing, electrical connections should be made by qualified personnel who will observe all the applicable plumbing, sanitary and safety codes and the National Electrical Code.

20-1/2" 25-3/8" Min. 1-1/4" Max. 3/16" Min.

Table Construction

Utilities
Water 1/2" water inlet
Electrical 115V; 16 amps draw 20 amp breaker required
Drain 2" LPS.

Moyer Diebel – USA 3765 Champion Blvd., NC 27105 336-661-1979 • Fax: 336-661-1979

Moyer Diebel – Canada 2674 N. Service Rd, Jordan Station, Ontario, Canada LOR 1SO 800-263-5798 • Fax: 905-562-5422

www.moyerdiebel.com • sales@moyerdiebellimited.com

SPECIFICATIONS Capacities Racks per hr. (NSF rated) 40 Pump Capacity 52 Gal/197 LPM **Motor horsepower** 1 HP **Water consumption** Gal. per hr. (max. use) 40.4 [152.9/33.6] [liters/imp gal.] Gal. per rack 1.01 [liters/imp gal.] [3.8/0.84] Temperature °F/°C Required 120/49 Recommended 140/60 Time cycle in seconds Wash 45 Rinse 30 Dwell 15 90 Total cycle

